


HAND WINCH WITH WIRE ROPE

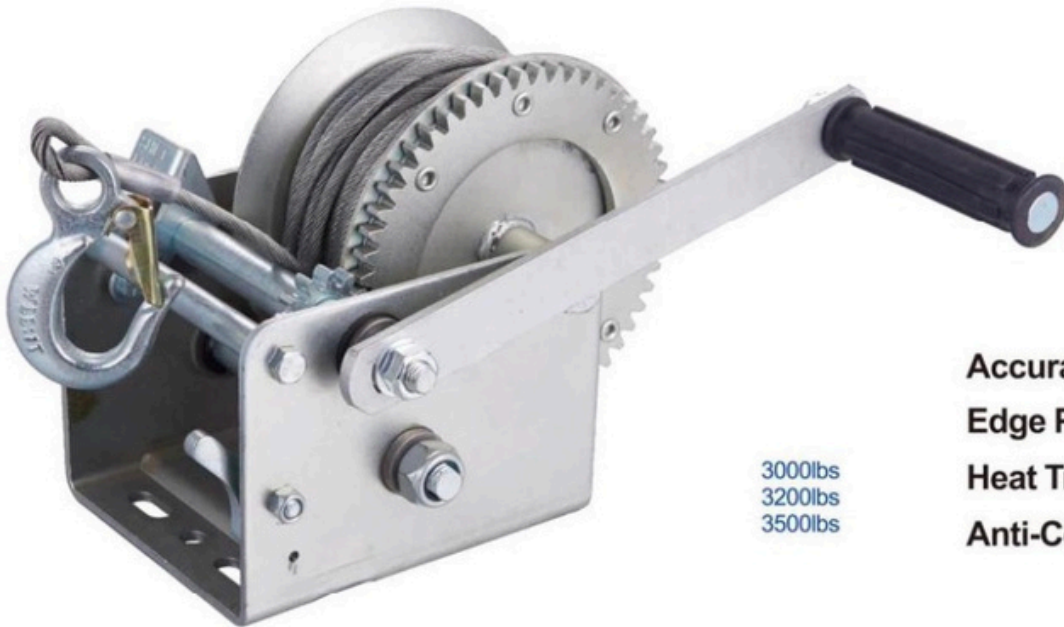

3000lbs
3200lbs
3500lbs

Accurate Steel Stamping
Edge Polish
Heat Treatment
Anti-Corrosion Treatment

Part No.	Capacity(Kg)	B/S(kg)	Gear Ratio	Way/Speed	Cable	N.W.(kg)
SL-HW600	272	408	3.2:1	1 way or 2 way	Φ4mm×8m	2.5
SL-HW800	362	544	3.2:1	1 way or 2 way	Φ4mm×8m	2.5
SL-HW1000	454	675	4.1:1	2 way/1 speed	Φ4mm×10m	3.67
SL-HW1200	544	825	4.1:1	2 way/1 speed	Φ4mm×10m	3.67
SL-HW1400	640	900	4:1	2 way/1 speed	Φ5mm×10m	4.3
SL-HW1600	700	1080	4:1	2 way/1 speed	Φ5mm×10m	4.3
SL-HW1800	800	1200	4:1/8:1	2 way/2 speed	Φ5mm×10m	5.2
SL-HW2000	900	1350	4:1/8:1	2 way/2 speed	Φ5mm×10m	5.3
SL-HW2500	1100	1650	4:1/8:1	2 way/2 speed	Φ5mm×10m	5.3
SL-HW3000	1360	2040	4.4:1/9.3:1	2 way/2 speed	Φ6mm×10m	8.7
SL-HW3200	1455	2180	4.4:1/9.3:1	2 way/2 speed	Φ6mm×10m	8.7
SL-HW3500	1590	2385	4.4:1/9.3:1	2 way/2 speed	Φ6mm×10m	8.7