


G80 EUROPEAN TYPE CONNECTING LINK




ITEM NO.	mm	WEIGHT/KG	WLL/T	B.L/T	Amm	Lmm	Kmm	Hmm
6		0.68	1.12	4.48	15	58	42	7
7		0.145	1.5	6	19	71.8	54.8	8.5
7-8		0.146	2	8	18	79.5	62.5	8.5
8		0.16	2	8	18	79.5	60.5	8.5
10		0.3	3.15	12.6	25	93	68	10.8
13		0.7	5.3	21.2	29	117	87	15
16		1.1	8	32	34.5	148	108.4	19.8
18		1.84	10	40	38	154	112	21
18-20		1.8	12.5	50	41	169.5	121.5	24
22		3.2	15	60	48	193.5	141.5	26
26		4.5	21.2	84.8	57.5	229	158	30
32		9	31.5	126	67	281	205	37

DIN 580 EYE BOLT

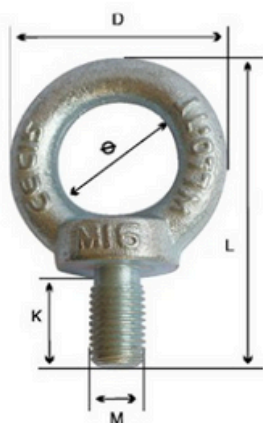

ITEM NO.	WEIGHT/KG	WLL/T(4:1)		Dmm	Kmm	ϕ mm	Lmm
		WLL 0°	WLL 90°				
M6	0.05	0.4	0.15	28	13	16	42
M8	0.06	1	0.4	36	15	20	51
M10	0.11	1	0.4	45	18	25	63
M12	0.18	2	0.75	54	22	30	75
M16	0.28	4	1.5	63	28	35	88
M20	0.45	6	2.3	72	30	40	101
M24	0.87	8	3.2	90	38	50	128
M30	1.66	12	4.5	108	45	60	154
M36	2.65	16	7	126	55	70	183
M42	4.03	24	9	144	65	80	212
M48	6.38	32	12	166	70	90	238

DIN 580 EYE NUT

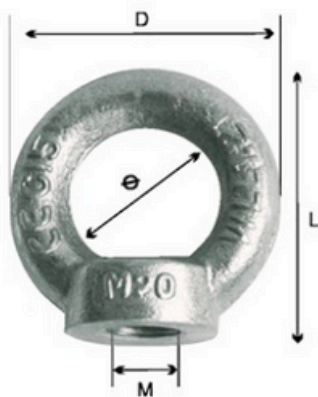

ITEM NO.	WEIGHT/KG	WLL/T(4:1)		Dmm	ϕ mm	Lmm
		WLL 0°	WLL 90°			
M6	0.049	0.4	0.15	36	20	36
M8	0.05	1	0.4	36	20	36
M10	0.09	1	0.4	45	25	45
M12	0.16	2	0.75	54	30	53
M16	0.24	4	1.5	63	35	62
M20	0.36	6	2.3	72	40	71
M24	0.72	8	3.2	90	50	90
M30	1.32	12	4.5	108	60	109
M36	2.08	16	7	126	70	128
M42	3.11	24	9	144	80	147
M48	5.02	32	12	166	90	168