


WELD ON PIVOTING DLINK

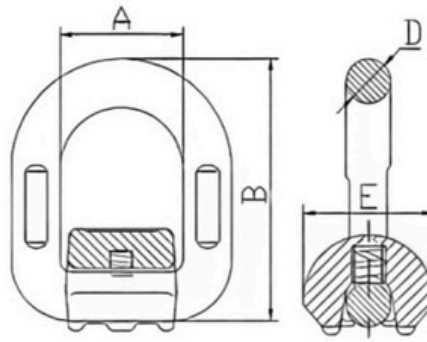

- Forged from high-strength, high-toughness special alloy steel and heat treated (quenched and tempered).
- Breakage Test: Strict sampling breakage tests are conducted on every batch of products.
- Surface Treatment: Powder coating.
- Electrogalvanized finish.
- Equipped with an internal spring for better pivoting control of the D-ring.

ITEM NO.	WEIGHT(kg)	WLL (T)	B.L(T)	DIMENSION(MM)			
				A	B	D	E
8-UCM0108-M6	0.47	1.12	4.48	41±2	78.5±3	13±1	38±2
8-UCM0108-M8	0.51	2	8	42±2	88±3	14±1	40±2
8-UCM0108-M10	0.69	3.15	12.6	46±2	94±3	17±1	43±2
8-UCM0108-M12	1.46	5.3	21.2	55±3	118±4	22±2	61±3
8-UCM0108-M14	2.52	8	32	70±3	141±4	26.5±2	70.5±3
8-UCM0108-M16	3.59	10	40	85±4	165±5	28±3	76±4
8-UCM0108-M18	5.79	15	60	97±4	188±5	34±3	90±4