


SLIDING EYE CHOKE HOOK

- Forged from high-strength, high-toughness special alloy steel and heat treated (quenched and tempered).
- Breakage Test: Strict sampling breakage tests are carried out on every batch of products.
- Surface Treatment: Powder coating.




ITEM NO.	WEIGHT (kg)	WLL (T)	B.L (T)	DIMENSION(MM)				
				D±1	A±1.5	B±1.5	E±3	L±2.5
8-UCM0066-3/8-1/2	0.68	1.6	8	17	50	71	18	132
8-UCM0066-5/8	1.21	2	10	22	63.5	79	20	151.3
8-UCM0066-3/4	1.99	3	15	28	69	103	26	170
8-UCM0066-1	4.18	5	25	32.5	85.7	135	33	213



- Individually proof-tested at 2.5 times the Working Load Limit.
- Fatigue tested at 1.5 times the Working Load for 20,000 cycles.

SHANK HOOK

- Forged from alloy steel or carbon steel, quenched and tempered. Strict heat treatment ensures high strength and toughness.
- Surface Treatment: Powder coating.

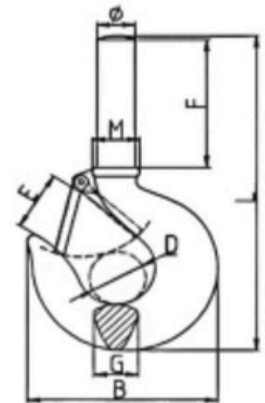

ITEM NO.	WEIGHT (KG)	WLL/T(4:1)		DIMENSION(MM)							
		CARON	ALLOY	B	E	φ	M	G	F	D	L
UCM0093	0.31	0.75	1	73.5±3	23±2	15±1	18±2	16±1	51±3	19±1	129±4
UCM0093	0.52	1	1.5	80±3	23±2	16.7±1	20±2	18±1	58±3	20±1	147±4
UCM0093	0.72	1.5	2	92±4	28.8±2	18.4±2	23±2	22.5±2	67±3	25±1	164.7±5
UCM0093	0.96	2	3	104.5±4	31±3	22.4±2	26±2	24±2	70.5±4	30±1	179.5±5
UCM0093	1.7	3	5	125.5±4	36±3	29.5±2	32±3	29±2	84±4	33±2	216.5±6
UCM0093	3.31	5	7	167±5	48±3	35.8±3	40±3	36.5±3	95.5±4	45±2	265±6
UCM0093	6.52	7	11	191.5±5	55±3	46±3	51±3	47.8±3	114±5	52±2	323±7
UCM0093	9.33	10	15	214±6	64±3	50.8±4	55.6±3	55.5±3	118±5	58±3	346±8
UCM0093	17.46	15	22	262±6	86±4	65±4	68.8±4	68.5±4	146±5	70±3	431±8