

HORIZONTAL LIFTING CLAMP






PDB



PPD

- Suitable for lifting and transport of steel plates, construction and profiled bar in horizontal position.
- Manufactured from high quality carbon steel.
- Avoid snatch or shock loading.
- The working load limit is the maximum load that the clamp is authorized to support when used in pairs with a lift angle of 60° .
- In lifting operations the clamps can be used in pairs or multiples.
- The screw jaw of the body can be changed, also have a safety button.

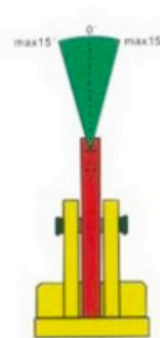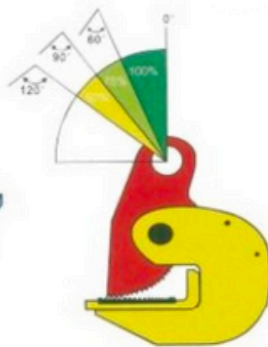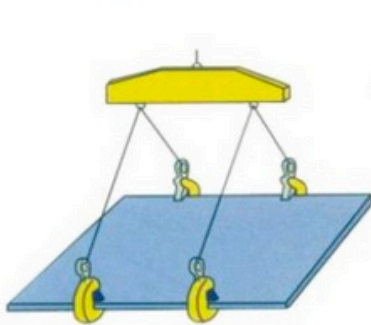

| Part No. | Model | WLL (tonnes) | Jaw Opening (mm) | Weight (kg) |
|----------|--------|--------------|------------------|-------------|
| GL-0038 | PDB0.8 | 0.8 | 0-25 | 2.5 |
| GL-0039 | PDB1 | 1.0 | 0-30 | 3.5 |
| GL-0040 | PDB1.6 | 1.6 | 0-30 | 4 |
| GL-0041 | PDB2 | 2.0 | 0-40 | 5 |
| GL-0042 | PDB3.2 | 3.2 | 0-45 | 6 |
| GL-0043 | PDB5 | 5.0 | 0-50 | 7.5 |
| GL-0044 | PDB8 | 8.0 | 0-80 | 10.5 |
| GL-0045 | PDB10 | 10.0 | 0-120 | 33 |
| GL-0046 | PDB16 | 16.0 | 50-150 | 50 |
| GL-0047 | PDB30 | 30.0 | 100-270 | 108 |